



Focus on international quality building materials production for 15 years



**费县金尔沃建材有限公司**位于山东费县，拥有独特的资源优势 and 区位优势、便利的交通条件。公司主营**烤漆龙骨、PVC贴面天花板、石膏板、轻钢龙骨、干壁钉**等绿色建筑新材料，是一家拥有自营进出口权的综合性企业。产品符合国家标准，具有**防水、阻燃、吸音、耐老化、耐用**等特点，畅销全国各地及海外。目前，我们的产品主要出口到非洲、中东、南亚、南美等国际市场。

公司恪守“**以质量求生存，以信誉求发展**”的经营方针，创造一流的质量，树一流的信誉，根据客户的发展需求，不断提供经济实用的产品和高效完善的售后服务，携手新老用户共同发展。

公司以“**诚信铸就品牌，质量决定未来**”的经营理念，不断完善机制，强化品牌意识，使产品质量卓越，售后服务更好，服务于客户多方面，希望通过我们的真诚和努力能成为您的长期合作伙伴，共创辉煌！



**FEIXIAN JINERWO BUILDING MATERIALS Co., Ltd.** is located in FeiXian, Shandong Province, with unique resource advantages, location advantages and convenient transportation conditions. The company is mainly engaged in **T-grids, PVC gypsum ceiling board, gypsum board, light steel keel, drywall screw** and other new green building materials. It is a comprehensive enterprise with self-supporting import and export rights. Products comply with national standards, with **waterproof, flame retardant, sound-absorbing, aging resistance, durable features**, sold throughout the country and overseas. At present, our products are mainly exported to Africa, Middle East, South Asia, South America and other international markets.


The company abides by the management principle of "**survive by quality, develop by reputation**", creates the first-class quality, tree the first-class prestige, according to the customer's development demand, unceasingly provides the economical practical product and the efficiency perfect after-sale service, hand in hand new old user common development.

With the management idea of "**good faith casts brand, quality decides future**", the company constantly improves the mechanism, strengthens the brand awareness, makes the product quality excellent, after-sale service is better, serves the customer in many aspects, hoped through our sincerity and effort can become your long-term partner, creates magnificently!


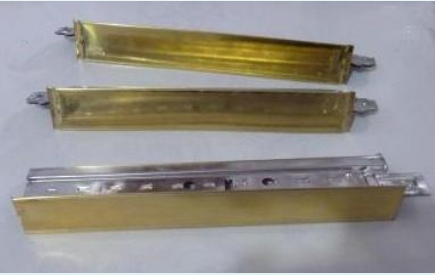

## 烤漆龙骨 / T-GRIDS:

烤漆龙骨由优质钢材制成。在生产过程中，热浸镀锌钢冷却后压制成T形，然后在表面烤漆。

T-grids are made of high quality steel. During the production process the hot dipped galvanized steel will be pressed into T shape after cooling and then baked with paint on surface.

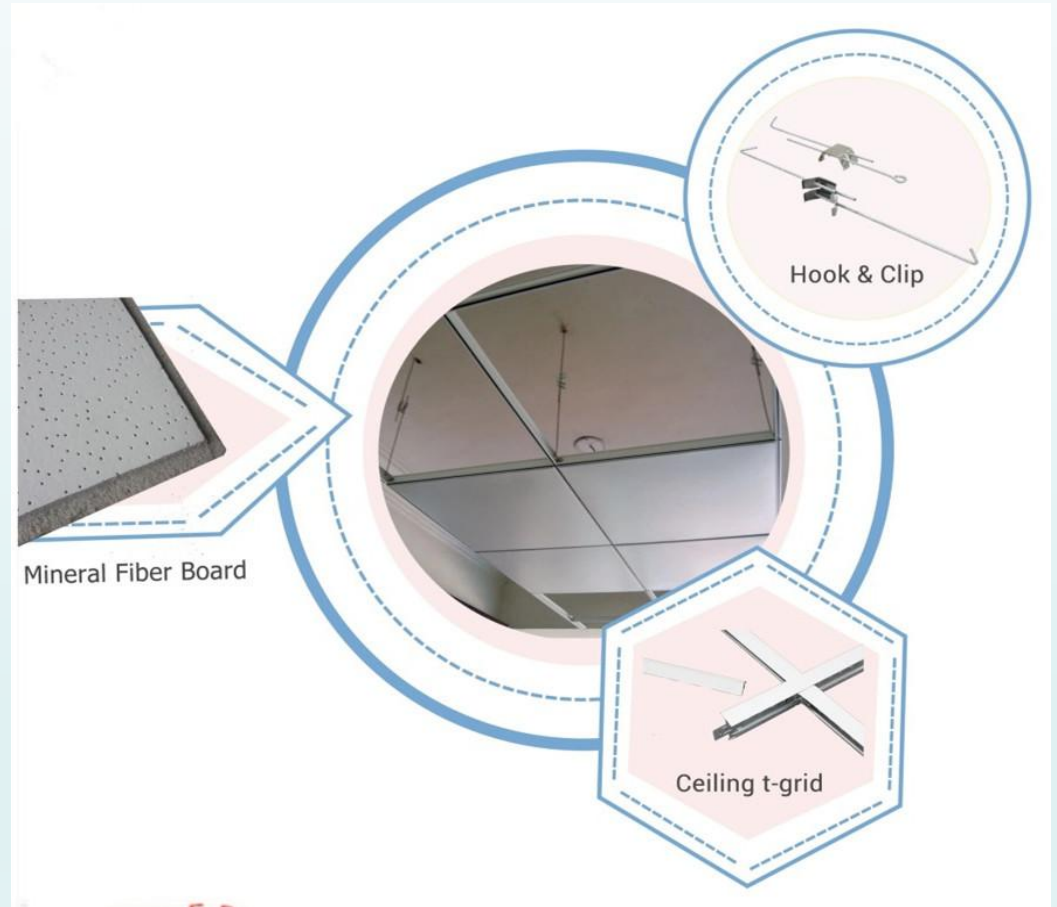
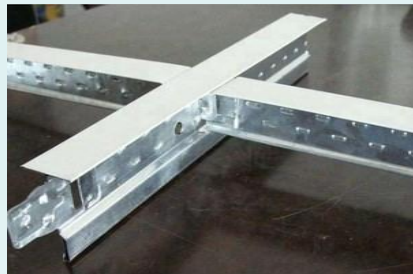


◆ 烤漆龙骨种类 / T-GRIDS TYPE:

类别 / TYPE	规格 / NAME	LENGTH / 长度 (MM)	THICKNESS / 厚度 (MM)	图片 / IMAGE
32白色平面 32White Flat	32*24*3600*0.3MM	3000/3600/3660	0.2 - 0.3	
	26*24*1200*0.3MM	1200/1220	0.2 - 0.3	
	26*24*600*0.3MM	600/610	0.2 - 0.3	
	22*22*3000*0.3MM	3000	0.2 - 0.4	
32镜面平面 32Mirror Surface Flat	32*24*3600*0.3MM	3000/3600/3660	0.2 - 0.3	
	26*24*1200*0.3MM	1200/1220	0.2 - 0.3	
	26*24*600*0.3MM	600/610	0.2 - 0.3	
	22*22*3000*0.3MM	3000	0.2-0.4	
32黑色平面 32Black Flat	32*24*3600*0.3MM	3000/3600/3660	0.2 - 0.3	
	26*24*1200*0.3MM	1200/1220	0.2 - 0.3	
	26*24*600*0.3MM	600/610	0.2 - 0.3	
	22*22*3000*0.3MM	3000	0.2 - 0.4	



◆ 烤漆龙骨种类 / T-GRIDS TYPE:

类别 / TYPE	规格 / NAME	LENGTH / 长度 (MM)	THICKNESS / 厚度 (MM)	图片 / IMAGE
32木纹平面 32Wooden Flat	32*24*3600*0.3MM	3000/3600/3660	0.2 - 0.3	
	26*24*1200*0.3MM	1200/1220	0.2 - 0.3	
	26*24*600*0.3MM	600/610	0.2 - 0.3	
	22*22*3000*0.3MM	3000	0.2 - 0.4	
32镭射平面 32Laser Film Flat	32*24*3600*0.3MM	3000/3600/3660	0.2 - 0.3	
	26*24*1200*0.3MM	1200/1220	0.2 - 0.3	
	26*24*600*0.3MM	600/610	0.2 - 0.3	
	22*22*3000*0.3MM	3000	0.2 - 0.4	
38白色平面 38White Flat	38*24*3600*0.3MM	3000/3600/3660	0.2 - 0.4	
	28*24*1200*0.3MM	1200/1220	0.2 - 0.4	
	28*24*600*0.3MM	600/610	0.2 - 0.4	
	25*25*3000*0.5MM	3000	0.2 - 0.5	



◆ 烤漆龙骨种类 / T-GRIDS TYPE:

类别 / TYPE	规格 / NAME	LENGTH / 长度 (MM)	THICKNESS / 厚度 (MM)	图片 / IMAGE
32平面凹槽 24mm Center Black	32*24*3600*0.3MM	3000/3600/3660	0.2 - 0.3	
	26*24*1200*0.3MM	1200/1220	0.2 - 0.3	
	26*24*600*0.3MM	600/610	0.2 - 0.3	
	22*22*3000*0.3MM	3000	0.2 - 0.4	
15平面凹槽 15mm Center Black	32*15*3600*0.3MM	3000/3600/3660	0.2 - 0.3	
	32*15*1200*0.3MM	1200/1220	0.2 - 0.3	
	32*15*600*0.3MM	600/610	0.2 - 0.3	
	22*22*3000*0.3MM	3000	0.2 - 0.4	
32木纹凹槽 24mm Wooden Center Black	32*24*3600*0.3MM	3000/3600/3660	0.2 - 0.3	
	26*24*1200*0.3MM	1200/1220	0.2 - 0.3	
	26*24*600*0.3MM	600/610	0.2 - 0.3	
	22*22*3000*0.3MM	3000	0.2 - 0.4	



◆ 烤漆龙骨种类 / T-GRIDS TYPE:

类别 / TYPE	规格 / NAME	LENGTH / 长度 (MM)	THICKNESS / 厚度 (MM)	图片 / IMAGE
32贯通 FUT-32H Black Line White Face	32*24*3600*0.3MM	3000/3600/3660	0.2 - 0.3	
	32*24*1200*0.3MM	1200/1220	0.2 - 0.3	
	32*24*600*0.3MM	600/610	0.2 - 0.3	
	22*22*3000*0.3MM	3000	0.2 - 0.4	
32贯通 FUT-32H Golden Line White Face	32*24*3600*0.3MM	3000/3600/3660	0.2 - 0.3	
	32*24*1200*0.3MM	1200/1220	0.2 - 0.3	
	32*24*600*0.3MM	600/610	0.2 - 0.3	
	22*22*3000*0.3MM	3000	0.2 - 0.4	
32贯通 FUT-32H White Line Yellow Face	32*24*3600*0.3MM	3000/3600/3660	0.2 - 0.4	
	32*24*1200*0.3MM	1200/1220	0.2 - 0.4	
	32*24*600*0.3MM	600/610	0.2 - 0.4	
	22*22*3000*0.3MM	3000	0.2 - 0.5	

◆ 烤漆龙骨其他的特点 / T-GRIDS ADVANTAGES:



Warehouse

Our Warehouse



Production Lines

Our Production Lines



**THICKNESS TOLERANCE (厚度差) :** ( 0.2~0.3MM )

**COATING (锌图层) :** 60~ 120G/M2

**ADVANTAGE (优点) :**

1. EASY INSTALLATION, SHORTEN WORKING TIME AND LABOUR FEES.

(安装方便, 缩短了工作时间和劳动力)

2. CAUTERIZATION RESISTANCE, WATER RESISTANCE, BEAUTY AND STRENGTH.

(耐腐蚀性、耐水性、美和力量)



## PVC 贴面天花板 / PVC GYPSUM CEILING TILES:

PVC石膏天花砖是由优质纸面石膏板、铝箔和PVC薄膜制成，广泛应用于办公、餐饮、商店、超市、医院等工程的吊顶。

PVC Laminated Gypsum Ceiling Tile is made of high quality paper gypsum board, aluminium foil and PVC film, it is popular used for suspended ceiling of office, restaurant, shop, supermarket, hospital and other projects.




- ◆ 01. High strength, light weight, durable.
- 02. Popular designed patterns for your choose, easy to match lamps or other ceiling parts.
- 03. Flexible suspension system makes each ceiling tile easily installed and disconnected.
- 04. Does not contain toxic substances, has a certain regulatory role to the room temperature, beneficial to human health, is the ideal green building materials.

◆ PVC 贴面天花板的规格 / PVC GYPSUM CEILING TILES SPECIFICATIONS:

规格 (NORMAL SIZE)	厚度 (THICKNESS)	公差 (TOLERANCE)	装箱量 (SQM/20')	装箱 (PACKAGE)
	(MM)			
595*595mm	7	长度 Length: <math>\pm 2\text{mm}</math>	4320	整箱 (CARTON)
600*600mm	7.5		4000	白色塑料袋 ( WITH SHRINKING FILM)
603*603mm	8	宽度 Width: <math>\pm 2\text{mm}</math>	3600	10片/箱 (10PCS/CTN)
595*1195mm	8.5		3400	8片/箱 (8PCS/CTN)
600*1200mm	9	厚度 Thickness: <math>\pm 0.5\text{mm}</math>	3200	6片/箱 (6PCS/CTN)
603*1212mm	9.5		3000	4片/箱 (4PCS/CTN)

**NOTE :** 其他的厚度规格根据客户的要求!  
 (Other thickness specifications according to customer requirements !)

◆ PVC 贴面天花板的花色 / PVC GYPSUM CEILING TILES DESIGN:

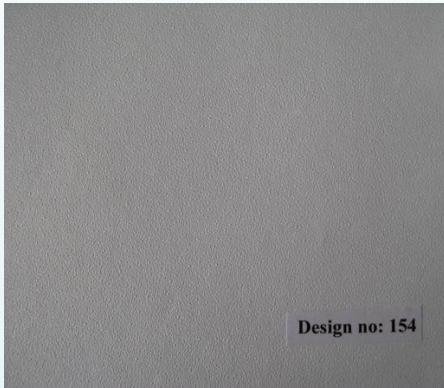

154



238



244



975



996



991

◆ PVC 贴面天花板的花色 / PVC GYPSUM CEILING TILES DESIGN:




**G238**



**G238-2**



**G239**

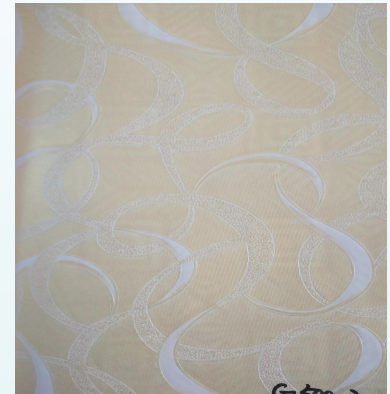

**G500-2**



**SKY**



**631**



**WE001-5**



**WOODEN**

◆ 注意：更多花色请与厂家直接联系！ /

Attention: please contact the manufacturer directly for more designs and colors! /

## 石膏板 / GYPSUM BOARD :



石膏板，通常被称为干墙、墙板或石膏板。它不同于其他板式建筑产品，如胶合板、硬纸板和纤维板，因为它的不燃芯和纸面。当接缝和扣件头被接缝复合系统覆盖时，石膏墙板形成适合大多数类型室内装饰的连续表面。

GYPSUM BOARD, is often called drywall, wallboard, or plasterboard. It differs from other panel-type building products, such as plywood, hardboard, and fiberboard, because of its noncombustible core and paper facers. When joints and fastener heads are covered with a joint compound system, gypsum wall board creates a continuous surface suitable for most types of interior decoration.



### GYPSUM BOARD

Gypsum Board Is Widely Used In Housing, Office Buildings, Shops, Hotels And Industrial Plants And Other Buildings Of The Inner Partition Wall And Ceiling Wall Panels.


- ✓ MATERIAL STABILITY
- ✓ SOUND INSULATION
- ✓ HEAT INSULATION
- ✓ FIREPROOFING
- ✓ SEISMIC



◆ 石膏板的种类 / GYPSUM BOARD TYPES :


1. 普通纸面石膏板 / STANDARD GYPSUM BOARD :

Appearance: Ivory face, Gray back

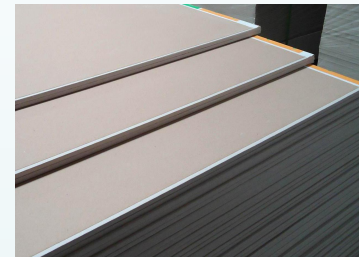

2. 防潮纸面石膏板 / MOISTURE-PROOF GYPSUM BOARD :

Appearance: Light- Green paper

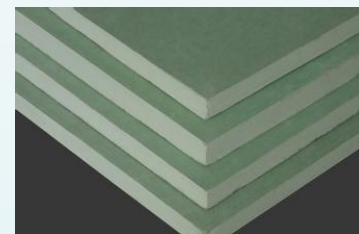

3. 防水纸面石膏板 / WATER-PROOF GYPSUM BOARD :

Appearance: Dark-Green paper



4. 防火纸面石膏板 / FIRE-PROOF GYPSUM BOARD :

Appearance: Pink paper






◆ 石膏板的规格 / GYPSUM BOARD SPECIFICATIONS:

种类 (TYPES)	普通/防潮/防水/防火(Standard/Moisture-proof/Water-proof/Fire-proof)
规格 (SIZES)	1200x2400,1220x2440,1200x2500,1200x3000,1200x2700,1830x1200,
厚度 (THICKNESS)	7mm,8mm,9mm,9.5mm,10mm.12mm,12.5mm.12.7mm.13mm,15mm
颜色 (COLOR)	灰色/绿色/红色 (grey/green/red)
边型 (EDGE TYPE)	楔形变/直角边 (Tapered edge/Square Edge)
证书 (CERTIFICATE)	ISO 9001/ISO14001/ASTM /CE
特征 (FEATURES)	重量轻, 强度高, 安装方便, 防火防水-证明: 隔热隔音、经济、环保 (Light weight and high strength;Easy to install;Fire-proof and water-proof;Heat insulation and sound insulation;Economic and environmental )
用途 (USE)	天花板系统和隔墙系统酒店/购物中心/家庭/办公室/餐厅/KTV False Ceiling System and Wall Partition SystemHotel/ Shopping Center/Home/Office/Restaurant/KTV

## 轻钢龙骨 / LIGHT STEEL KEEL :

轻钢龙骨，是一种新型的建筑材料，是以优质的连续热镀锌板带为原材料，经冷弯工艺轧制而成的建筑用金属骨架。用于以纸面石膏板、装饰石膏板等轻质板材做饰面的非承重墙体和建筑物屋顶的造型装饰。适用于多种建筑物屋顶的造型装饰、建筑物的内外墙体及棚架式吊顶的基础材料。

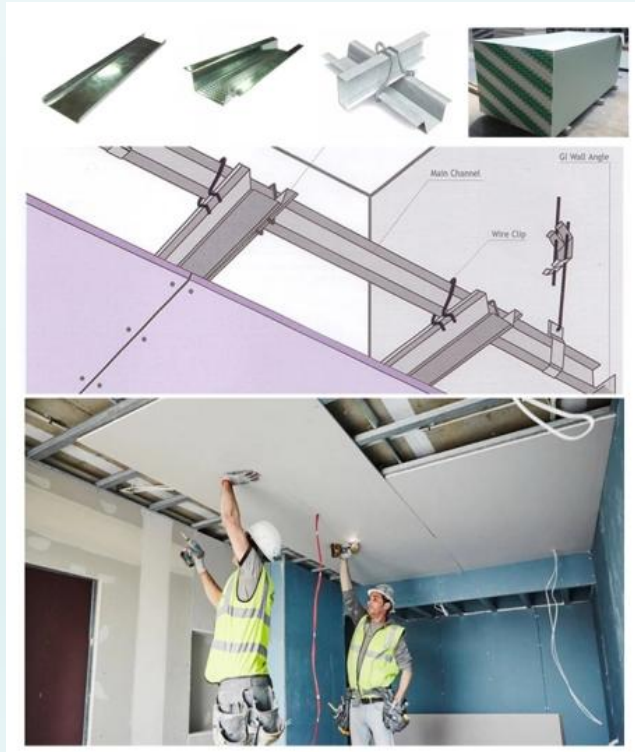


Light steel keel is a new type of building material, which is made of high-quality continuous hot-dip galvanized sheet and strip by cold bending process. It is used for modeling decoration of non load bearing wall and building roof decorated with light board such as gypsum board and decorative gypsum board. It is suitable for the modeling decoration of various building roofs, the internal and external walls of buildings and the basic materials of scaffolding ceiling.



◆ 轻钢龙骨的种类 / LIGHT STEEL KEEL TYPES :

1. 吊顶系列 ( Suspended Ceiling System ) :

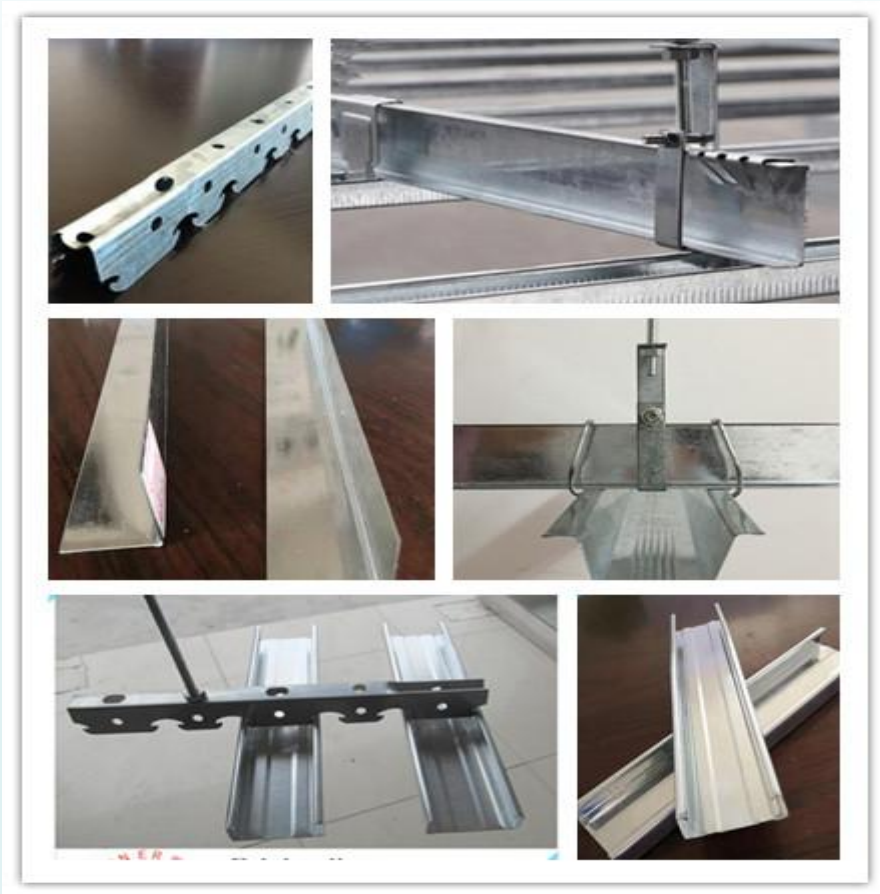

主龙骨 (Main Channel)	38*12 45*15 50*15
副龙骨 (Furring Channel /Omega)	50*19 68*35*22
边角 (Wall Angle)	25*25 30*30
卡式主骨 (Double Channel)	32*18 38*18

◆ 轻钢龙骨的种类 / LIGHT STEEL KEEL TYPES :

2. 隔墙系列 ( Partition System ) :



竖骨 (Stud)	50*35 70*35 75*35 75*45 100*35
天地 (Track)	50*30 75*30 100*30
副龙骨 (Furring Channel Track)	38*12

◆ 轻钢龙骨的特点 / LIGHT STEEL KEEL ADVANTAGES :

- 1、自身质量较轻(It has light weight. )
- 2、防火性能优良(Excellent fire resistance.)
- 3、施工效率较高(The construction efficiency is high.)
- 4、结构安全可靠(The structure is safe and reliable.)
- 5、抗冲击性能好(Good impact resistance.)
- 6、抗震性能良好(The seismic performance is good.)
- 7、可提高隔热、隔声效果及室内利用率(It can improve the heat insulation, sound insulation effect and indoor utilization rate.)

*Production Process*



**FEIXIAN JINERWO BUILDING MATERIALS CO.,LTD**






◆ 干壁钉规格 / DRYWALL SCREWS SPECIFICATIONS :



Product Name	Size (mm)
Drywall tapping screw (fine thread)	3.5*13
Drywall tapping screw (fine thread)	3.5*16
Drywall tapping screw (fine thread)	3.5*20
Drywall tapping screw (fine thread)	3.5*25
Drywall tapping screw (fine thread)	3.5*30
Drywall tapping screw (fine thread)	3.5*38
Drywall tapping screw (fine thread)	3.5*50

## Advantages of Our Products

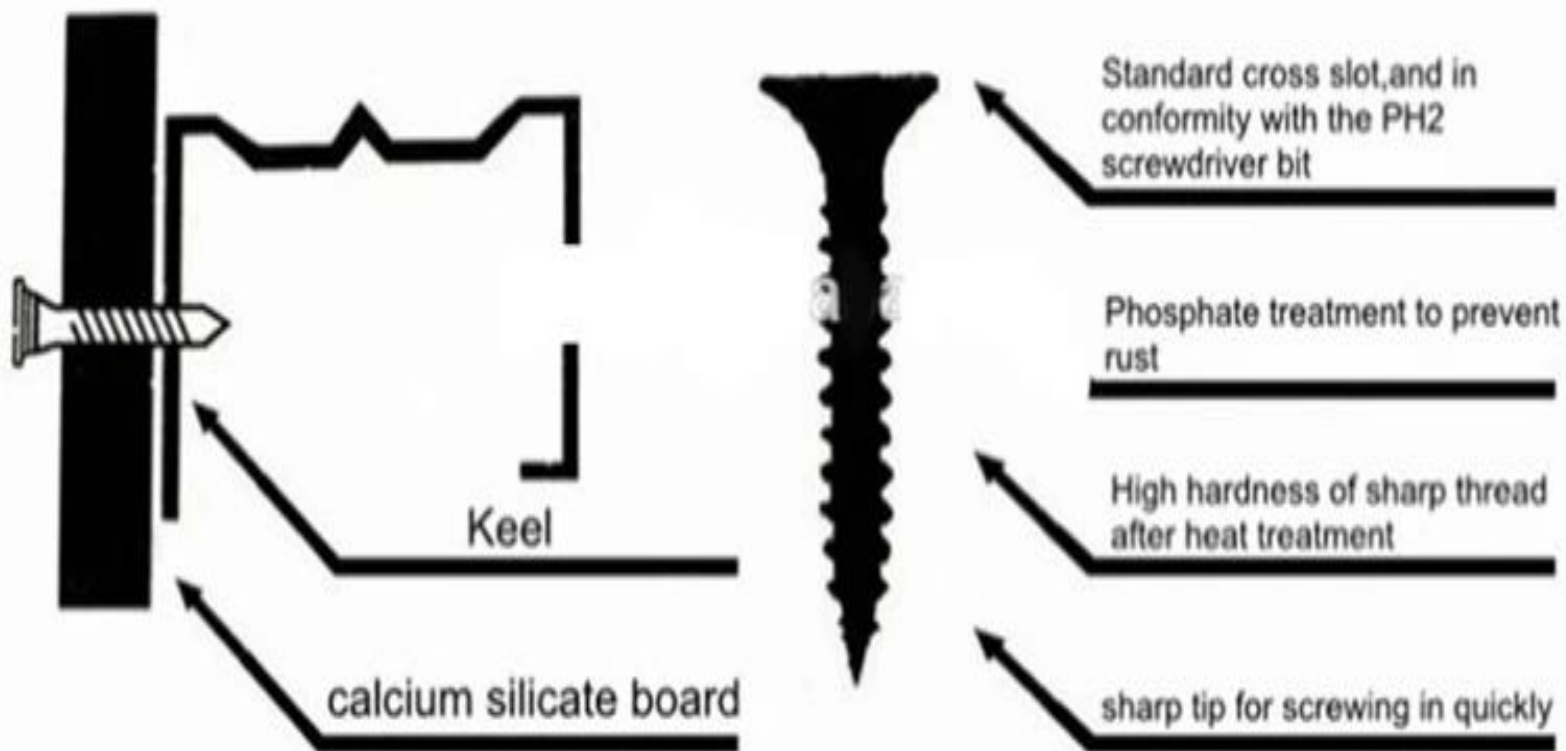



费县金尔沃建材有限公司 -- FEIXIAN JINERWO BUILDING MATERIALS CO., LTD



**ADDRESS: FEIXIAN COUNTRY, LINYI CITY, SHANDONG PROVICE**

**WELCOME TO VISIT OUR FACTORY !**

**24hours on line:+8618669319320**